


DATA SHEET

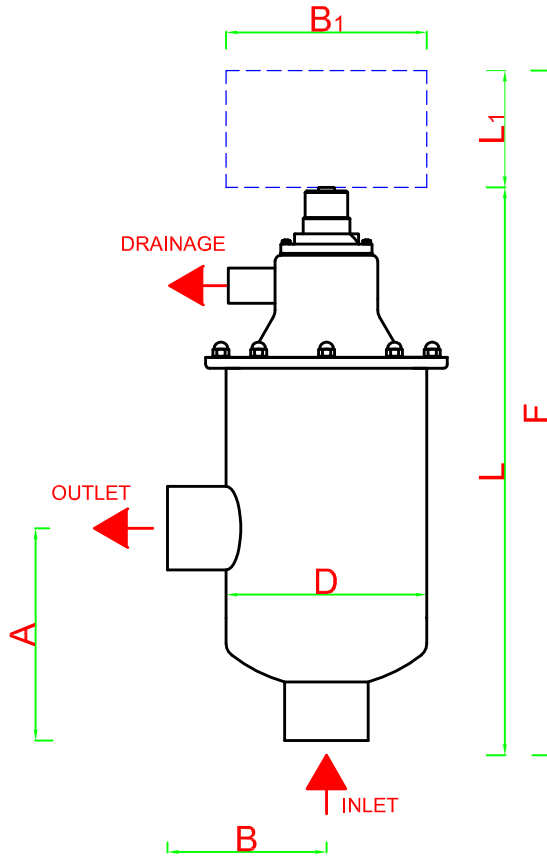

Free space for maintenance

For high pressure, high temperature and different materials, custom made filters can be produced.

Body Material:	AISI 304L (316L optional)
Screen Material:	AISI 316L
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During Back-Flush:	2 bar
Max. Operating Temperature:	60 °C
Headloss at Max. Flow Rate:	0.2 bar
Approximate Back-Flush Time:	10-15 sec.
Approximate Back-Flush Water Consumption:	80-120 lt/back-flush
Control System:	Hydraulic or Electric

FILTER MODEL	CONNECTION	INLET/OUTLET		A	B	B1	L	L1	F	D	WEIGHT (kg)		MAX. FLOW RATE m³/h	FILTRATION AREA cm²
		inch	DN								FULL	EMPTY		
SFH 110202	THREADED	2"	50	365	190	370	930	260	1190	10"	65	35	25	2400

All dimensions are in millimeters.

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification.  
All the rights for this drawing are belonging to ANTEL TREATMENT SYSTEM CONS.IND&COM.CO.INC. It can not be copied or given to the persons without permission.

