
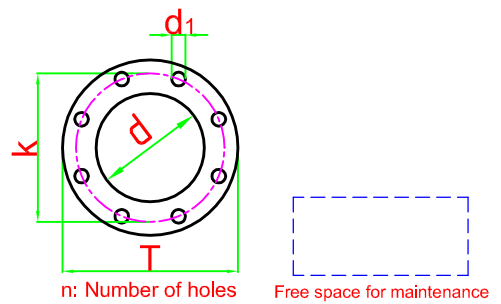


DATA SHEET

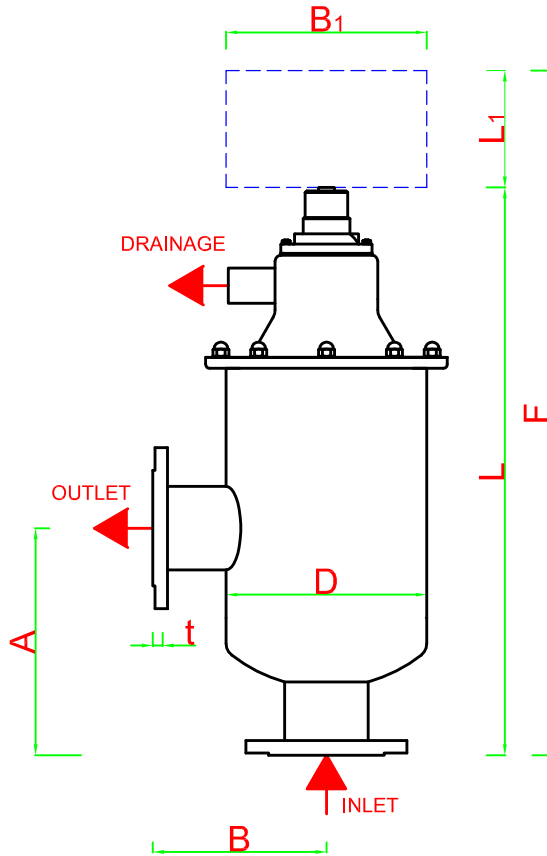

For high pressure, high temperature and different materials, custom made filters can be produced.

Body Material:	AISI 304L (316L optional)
Screen Material:	AISI 316L
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During Back-Flush:	2 bar
Max. Operating Temperature:	60 °C
Headloss at Max. Flow Rate:	0.2 bar
Approximate Back-Flush Time:	10-15 sec.
Approximate Back-Flush Water Consumption:	80-120 lt/back-flush
Control System:	Hydraulic or Electric

INLET/OUTLET		FLANGE SIZES ND 10 - DIN 2576					
inch	DN	d	T	k	d ₁	n	t
4"	100	114.3	220	180	18	8	20
6"	150	168.2	285	240	22	8	22

FILTER MODEL	CONNECTION	INLET/OUTLET		A	B	B ₁	L	L ₁	F	D	WEIGHT (kg)		MAX. FLOW RATE	FILTRATION AREA
		inch	DN								FULL	EMPTY		
SFH 110206	FLANGED	6"	150	460	285	370	1025	260	1285	10"	80	50	120	2400

All dimensions are in millimeters.

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification. All the rights for this drawing are belonging to ANTEL TREATMENT SYSTEM CONS.IND&COM.CO.INC.It can not be copied or given to the persons without permission.

