
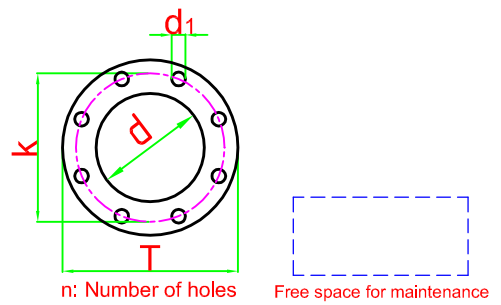


**DATA SHEET**

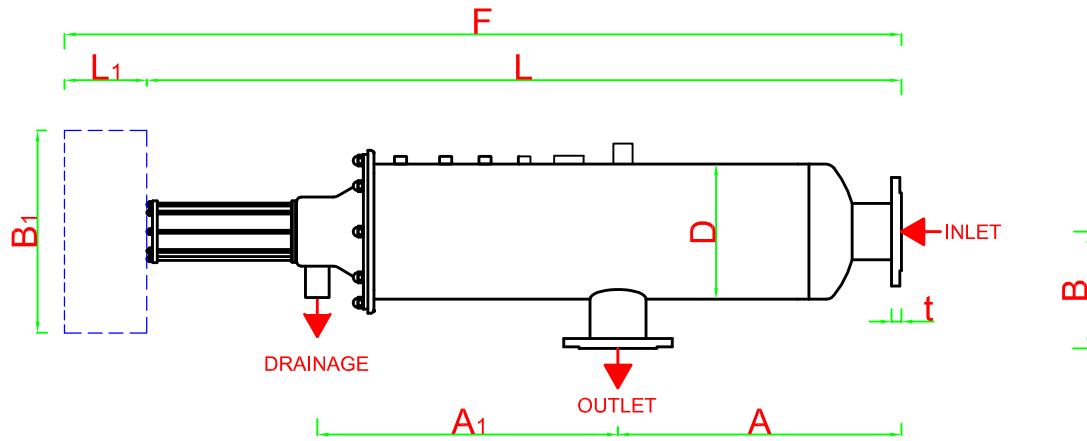

For high pressure, high temperature and different materials, custom made filters can be produced.

Body Material:	AISI 304L (316L optional)
Screen Material:	AISI 316L
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During Back-Flush:	2 bar
Max. Operating Temperature:	60 °C
Headloss at Max. Flow Rate:	0.2 bar
Approximate Back-Flush Time:	10-15 sec.
Approximate Back-Flush Water Consumption:	80-120 lt/back-flush
Control System:	Hydraulic or Electric

INLET/OUTLET		FLANGE SIZES ND 10 - DIN 2576					
inch	DN	d	T	k	d1	n	t
4"	100	114.3	220	180	18	8	20
6"	150	168.2	285	240	22	8	22

FILTER MODEL	CONNECTION	INLET/OUTLET		A	A1	B	B1	L	L1	F	D	WEIGHT (kg)		MAX. FLOW RATE m³/h	FILTRATION AREA cm²
		inch	DN									FULL	EMPTY		
SPT 110406	FLANGED	6"	150	755	698	285	370	1780	500	2280	10"	94	64	120	4800

All dimensions are in millimeters.

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification. All the rights for this drawing are belonging to ANTEL TREATMENT SYSTEM CONS.IND&COM.CO.INC.It can not be copied or given to the persons without permission.

