



**DATA SHEET**

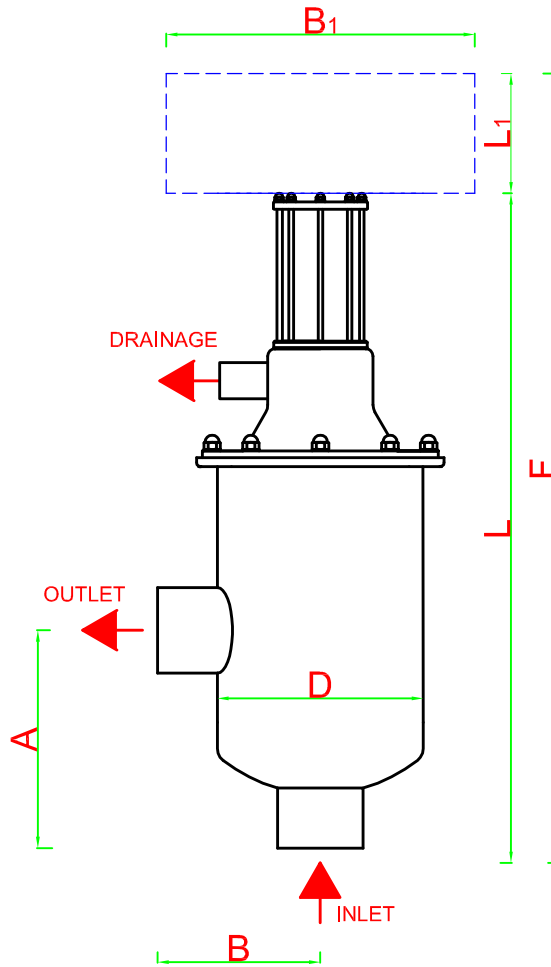

  
 Free space for maintenance

For high pressure, high temperature and different materials, custom made filters can be produced.

Body Material:	AISI 304L (316L optional)
Screen Material:	AISI 316L
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During Back-Flush:	2 bar
Max. Operating Temperature:	60 °C
Headloss at Max. Flow Rate:	0.2 bar
Approximate Back-Flush Time:	10-15 sec.
Approximate Back-Flush Water Consumption:	80-120 lt/back-flush
Control System:	Hydraulic or Electric

INLET/OUTLET		FLANGE SIZES ND 10 - DIN 2576						
inch	DN	d	T	k	d1	n	t	
4"	100	114.3	220	180	18	8	20	
6"	150	168.2	285	240	22	8	22	

FILTER MODEL	CONNECTION	INLET/OUTLET		A	B	B1	L	L1	F	D	WEIGHT (kg)		MAX. FLOW RATE	FILTRATION AREA
		inch	DN								FULL	EMPTY		
SFH 110202-P	THREADED	2"	50	365	190	370	1040	595	1635	10"	70	40	25	2400

All dimensions are in millimeters.

Antel-Filtermox reserves the rights to modify any of the technical information in this document without prior notification.

All the rights for this drawing are belonging to ANTEL TREATMENT SYSTEM CONS.IND&COM.CO.INC.It can not be copied or given to the persons without permission.