


DATA SHEET

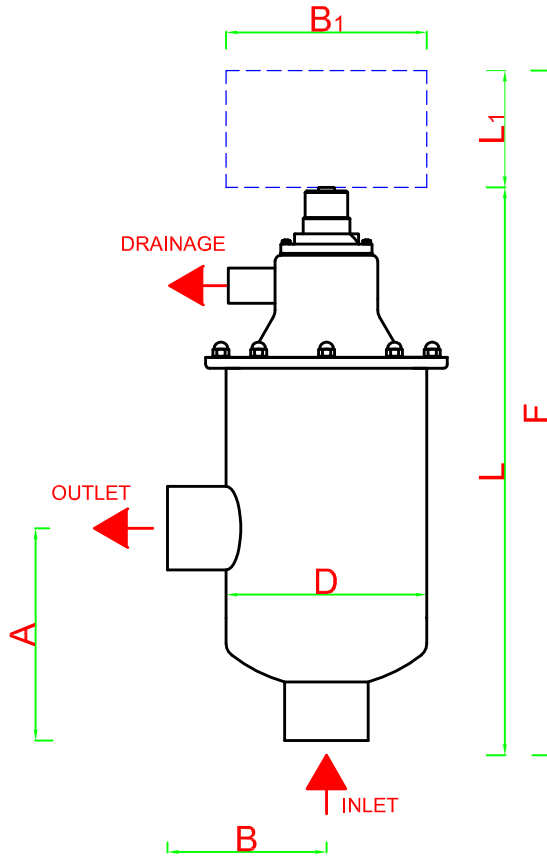

Free space for maintenance

For high pressure, high temperature and different materials, custom made filters can be produced.

Body Material:	AISI 304L (316L optional)
Screen Material:	AISI 316L
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During Back-Flush:	2 bar
Max. Operating Temperature:	60 °C
Headloss at Max. Flow Rate:	0.2 bar
Approximate Back-Flush Time:	10-15 sec.
Approximate Back-Flush Water Consumption:	80-120 lt/back-flush
Control System:	Hydraulic or Electric

FILTER MODEL	CONNECTION	INLET/OUTLET		A	B	B <sub>1</sub>	L	L <sub>1</sub>	F	D	WEIGHT (kg)		MAX. FLOW RATE m <sup>3</sup> /h	FILTRATION AREA cm <sup>2</sup>
		inch	DN								FULL	EMPTY		
SFH 110103	THREADED	3"	80	280	205	370	745	260	1005	10"	55	30	40	1200

All dimensions are in millimeters.

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification.  
All the rights for this drawing are belonging to ANTEL TREATMENT SYSTEM CONS.IND&COM.CO.INC.It can not be copied or given to the persons without permission.

