
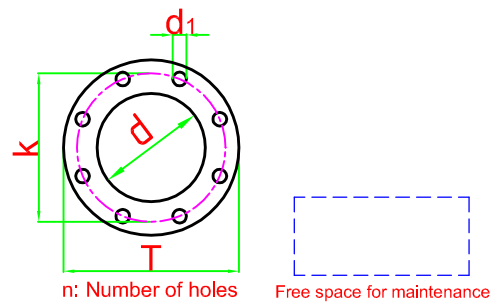


**DATA SHEET**

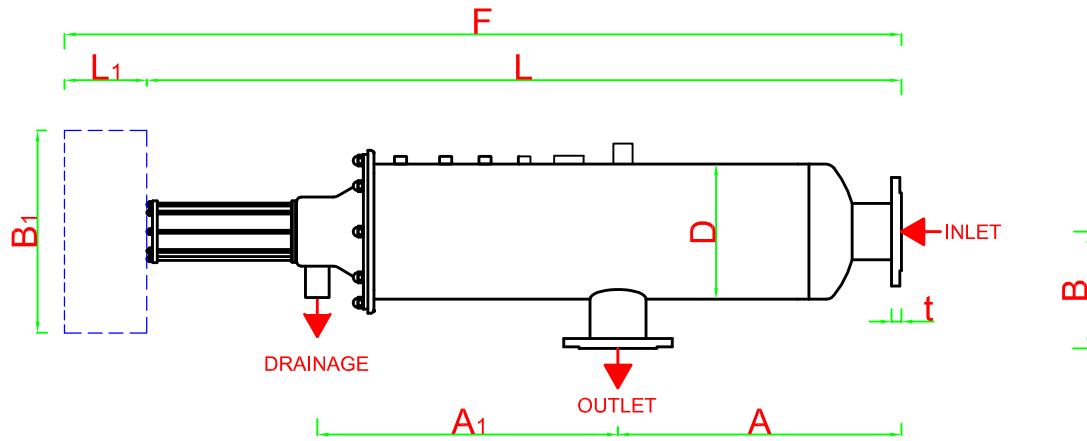

For high pressure, high temperature and different materials, custom made filters can be produced.

Body Material:	AISI 304L (316L optional)
Screen Material:	AISI 316L
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During Back-Flush:	2 bar
Max. Operating Temperature:	60 °C
Headloss at Max. Flow Rate:	0.2 bar
Approximate Back-Flush Time:	10-15 sec.
Approximate Back-Flush Water Consumption:	80-120 lt/back-flush
Control System:	Hydraulic or Electric

INLET/OUTLET		FLANGE SIZES ND 10 - DIN 2576					
inch	DN	d	T	k	d1	n	t
4"	100	114.3	220	180	18	8	20
6"	150	168.2	285	240	22	8	22

FILTER MODEL	CONNECTION	INLET/OUTLET		A	A1	B	B1	L	L1	F	D	WEIGHT (kg)		MAX. FLOW RATE	FILTRATION AREA
		inch	DN									FULL	EMPTY		
SPT 110408	FLANGED	8"	200	755	698	285	370	1780	500	2280	10"	110	80	200	4800

All dimensions are in millimeters.

Antel-Filternox reserves the rights to modify any of the technical information in this document without prior notification. All the rights for this drawing are belonging to ANTEL TREATMENT SYSTEM CONS.IND&COM.CO.INC.It can not be copied or given to the persons without permission.

