

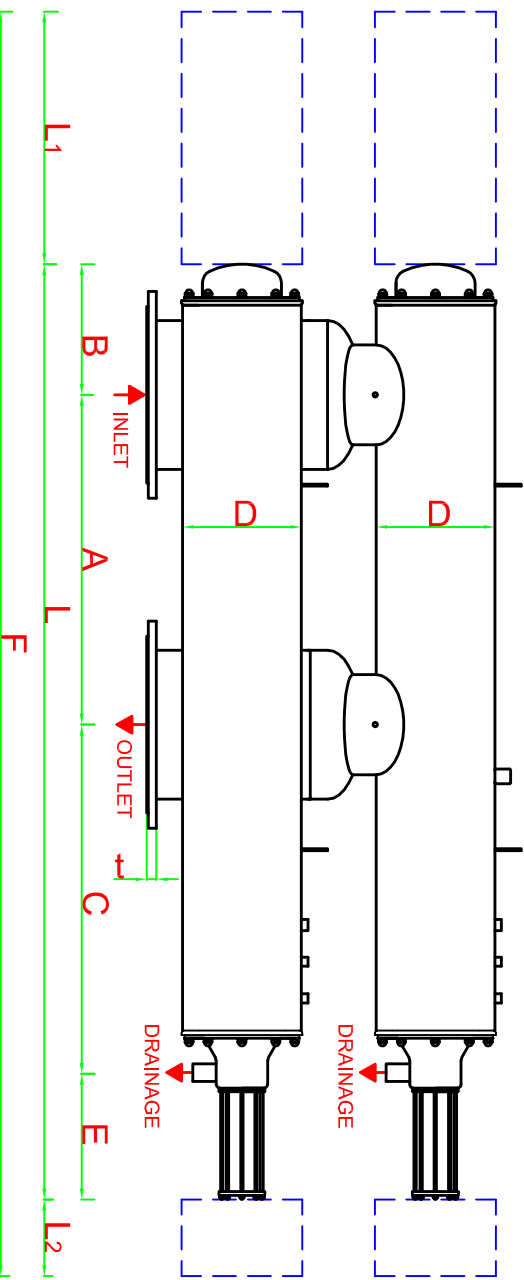


**DATA SHEET**

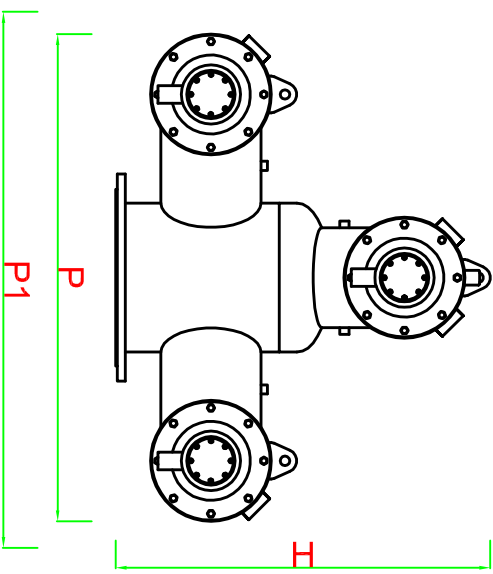

For high pressure, high temperature and different materials, custom made filters can be produced.

Body Material:	AISI 304L (316L optional)
Screen Material:	AISI 316L
Max. Operating Pressure:	10 bar
Min. Inlet Pressure Required During Back-Flush:	2 bar
Max. Operating Temperature:	60 °C
Headloss at Max. Flow Rate:	0,2 bar
Approximate Back-Flush Time:	60-80 sec.
Approximate Back-Flush Water Consumption:	450-600 l/back-flush
Control System:	Electric



n: Number of holes



FILTER MODEL	INLET/OUTLET		FLANGE SIZES ND 10 - DIN 2576						A min.	L	L1	L2	F	B	C	E	D	H	P	P1	WEIGHT (kg)		MAX. FLOW RATE m³/h	FILTRATION AREA cm²
	inch	DN	d	T	k	d1	n	t													FULL	EMPTY		
PTR 312612	12	300	323,9	445	400	22	12	26	900	2525	1700	500	4725	390	895	340	12"	1020	1125	1925	995	425	1000	21600

All dimensions are in millimeters.

Anitel-Fitemox reserves the rights to modify any of the technical information in this document without prior notification. All the rights for this drawing are belonging to ANITEL TREATMENT SYSTEM CONS.INDRCOM.CO.INCIT can not be copied or given to the persons without permission.

